

Dorado Drain Pavers



Photo courtesy of Romex

Premium Finish Face Mix Technology

Designed to fit in our Dorado pavers. This compatibility together with the unique look creates new solutions for Permeable areas.

RECOMMENDED APPLICATIONS



Permeable Paver



Walkways



Residential Driveway/Parking

COLOURS:



Natural




Charcoal

PAVER SIZE:



9" x 12"

BLOCK SPECIFICATION:

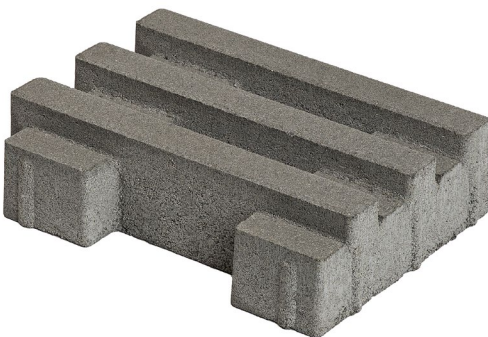

Percentage of surface opening is 25%.


| Size (in) | Pieces per sq.ft. | Sq.ft. per Pallet | Shipping Weight | PCS / Pallet |
|---|-------------------|-------------------|-----------------|--------------|
| 9" x 12" x 3-1/8" 228mm x 304mm x 80mm | 1.33 | 79 | 943kg / 2080lbs | 105 |

All sizes including 3 mm Spacer Bars

INSTALLATION INSTRUCTIONS:


Permeable Installation

FULL EXFILTRATION

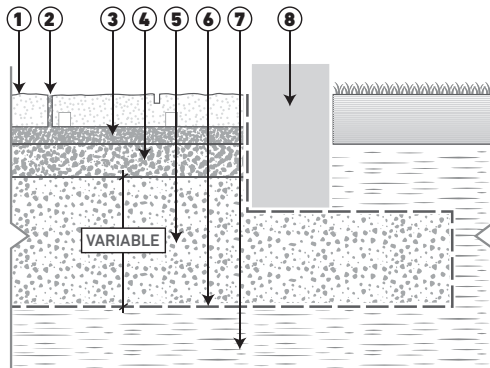

- 1 Paver
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- 3 Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5-10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5-28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

Sand Set Installation

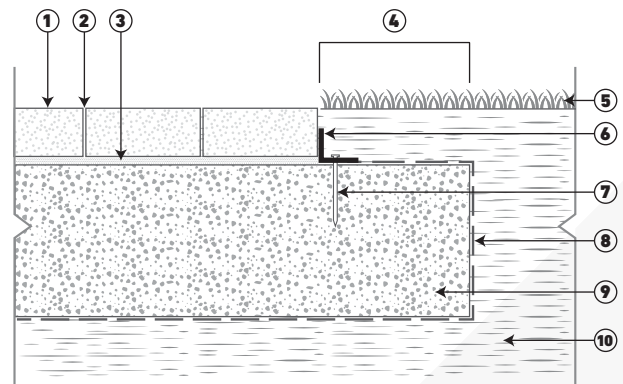

- 1 Paver
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade