

Dorado XL

Premium Finish Face Mix Technology



Photo courtesy of Groundwerx Landscape + Design

Winter Sky 24"x24" with Dorado inlaid 6"x12" Charcoal and 12"x12" Natural

DORADO XL COMMERCIAL PAVER

Commercial paver designed for vehicular traffic areas



INDIVIDUAL SIZES:



4.5" x 9"

Size (in)	Pieces per sq.ft.	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
4.5" x 9" x 3-1/8" 113mm x 228mm x 80mm	3.6	79	1383kg / 3050lbs	280

All sizes including 3 mm Spacer Bars

NON-STOCKING SIZES: (Minimum Order Quantity Required)



9" x 9"

Size (in)	Pieces per sq.ft.	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
9" x 9" x 3-1/8" 228mm x 228mm x 80mm	1.8	79	1383kg / 3050lbs	140

All sizes including 3 mm Spacer Bars

RECOMMENDED APPLICATIONS:



Parking Lots




Vehicular Traffic

DORADO XL SLABS

Extra large size Dorado slabs allows endless colour and pattern variations



INDIVIDUAL SIZES:



Size (in)	Pieces per sq.ft.	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
12" x 24" x 3-1/8" 304mm x 606mm x 80mm	0.5	56	975kg / 2150lbs	28
24" x 24" x 3-1/8" 606mm x 606mm x 80mm	0.25	56	975kg / 2150lbs	14

All sizes including 3 mm Spacer Bars

RECOMMENDED APPLICATIONS



Patios



Walkways



Residential Driveway/Parking



Natural



Charcoal




Winter Sky

Installation Instructions:


Permeable Installation

FULL EXFILTRATION

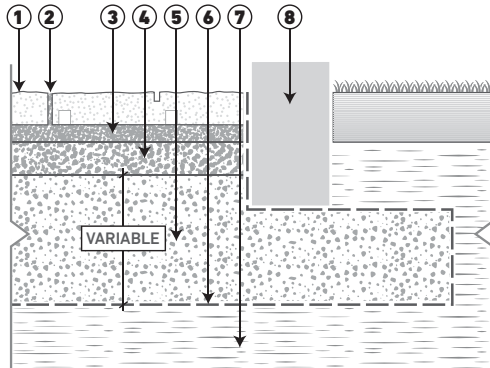


- 1 Slab
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- 3 Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5-10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5-28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

Sand Set Installation

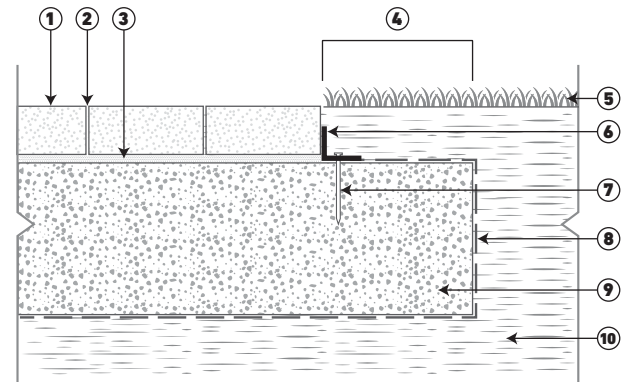

- 1 Slab
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade

Pedestal Set Installation

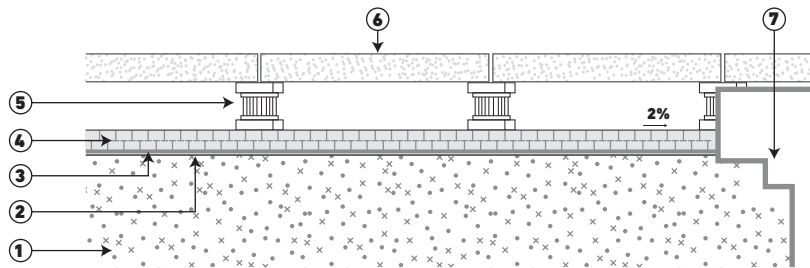

- 1 Structural deck
- 2 Waterproof membrane
- 3 Protection board and/or Drain mat
- 4 Rigid insulation
- 5 Pedestals
- 6 Slab
- 7 Roof drain

H-20
HS-20

All our pavers meet the H-20/H-S20 loading requirements. This determination allows for an occasional heavy vehicle such as a fire truck driving on the pavers. Specific site requirements will determine the appropriate paver usage. For example, heavily trafficked areas require more robust pavers installed in specific laying patterns.

For more information on H-20/HS-20 Loading, please visit:
www.newstonegroup.ca/H-20-HS-20-Loading.pdf



Scan QR code
for more information