

# Coastal Slate 3-Piece Combo

Premium Finish Face Mix Technology



Photo courtesy of Green Paradise Landscaping

Espresso with Winter Sky Border (Sealed)


Intended to be installed in a truly random pattern this concrete paving stone features the texture of natural sandstone.

## TRULY RANDOM PATTERN

The Coastal Slate has an uneven number of pieces of each size on the pallet, allowing you to construct a truly random pattern that emphasizes your own personal style.



## COMBO MOLD 3-PIECE:

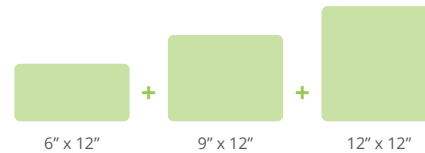

Size (in)	Type	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
6" x 12" x 2-3/8" 151mm x 304mm x 60mm	C	108	1361kg / 3000lbs	54
9" x 12" x 2-3/8" 228mm x 304mm x 60mm	E			36
12" x 12" x 2-3/8" 304mm x 304mm x 60mm	F			54

All sizes including 3 mm Spacer Bars



When installing pavers with raised surfaces it is strongly recommended to use a compactor with a rubber pad to prevent burnishing the raised surface.

## RECOMMENDED APPLICATIONS



Patios



Walkways



Residential Driveway/Parking




## COMBO MOLD PALLET LAYOUT

Image below show the paver configuration on the pallet, see page 34 for laying pattern.

### 3-Piece

F		F		F		F	
E	E	C	C	E	E		
F		C	C	C	C	F	

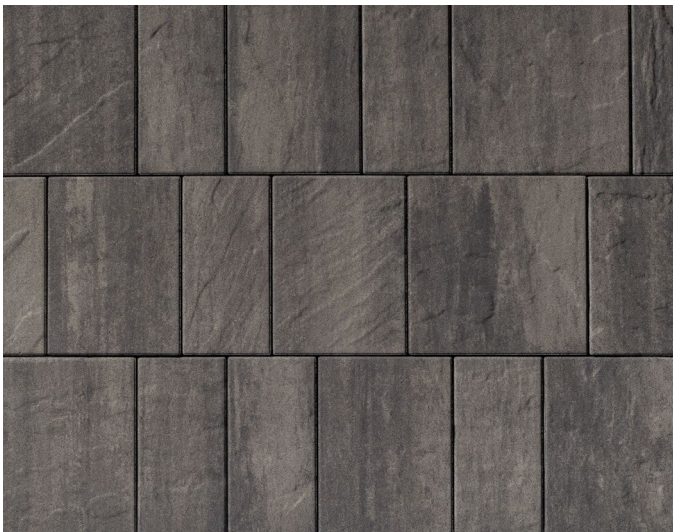

**Winter Sky**



**Birchwood**



**Espresso**




**Glacier**

Colours in photographs are not exact representations, but are given to provide close reference. Measurements and product dimension are nominal.

# Installation Instructions:


## Permeable Installation

### FULL EXFILTRATION

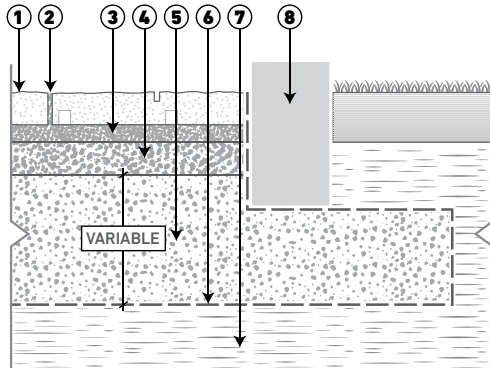

- 1 Paver
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- 3 Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5-10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5-28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

## Sand Set Installation

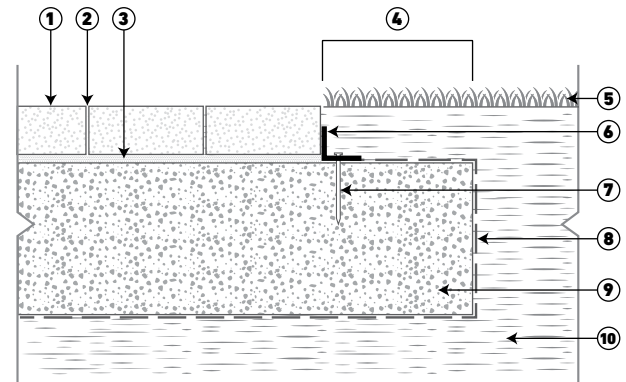

- 1 Paver
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade

**H-20**  
**HS-20**

All our pavers meet the H-20/H-S20 loading requirements. This determination allows for an occasional heavy vehicle such as a fire truck driving on the pavers. Specific site requirements will determine the appropriate paver usage. For example, heavily trafficked areas require more robust pavers installed in specific laying patterns.

For more information on H-20/HS-20 Loading, please visit:  
[www.newstonegroup.ca/H-20-HS-20-Loading.pdf](http://www.newstonegroup.ca/H-20-HS-20-Loading.pdf)



Scan QR code  
for more information