

Linaro

Premium Finish Face Mix Technology

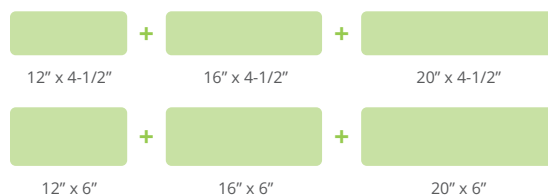


Photo courtesy of Ratan Raymon Construction Ltd.

Silver Grey, Midnight Black, and Graphite laid together. Pattern achieved by ordering pallets of three different colours.

Linaro is manufactured on a mixed pallet containing pavers of 2 different widths and 3 different lengths. This change in width and length creates an interesting combination of lineal pavers. Combining colours within the pattern adds further layers of interest. The visual scale is appropriate for everything from city plazas to residential drives.

COMBO MOLD - 6-PIECE:



Size (in)	Type	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
12" x 4-1/2" x 3-15/16" 305mm x 115mm x 100mm	A	56	1173kg / 2585lbs	18
16" x 4-1/2" x 3-15/16" 407mm x 115mm x 100mm	B			12
20" x 4-1/2" x 3-15/16" 508mm x 115mm x 100mm	C			18
12" x 6" x 3-15/16" 305mm x 153mm x 100mm	D			18
16" x 6" x 3-15/16" 407mm x 153mm x 100mm	E			12
20" x 6" x 3-15/16" 508mm x 153mm x 100mm	F			18

Wide spacer bars designed for permeable or sand set installation

RECOMMENDED APPLICATIONS



Patios



Walkways



Residential Driveway/Parking

COMBO MOLD PALLET LAYOUT

Image below shows the paver configuration on the pallet, see page 34 for laying pattern.

D	F
C	A
C	A
E	E
F	D
B	B
C	A
D	F

INSTALLATION PATTERN

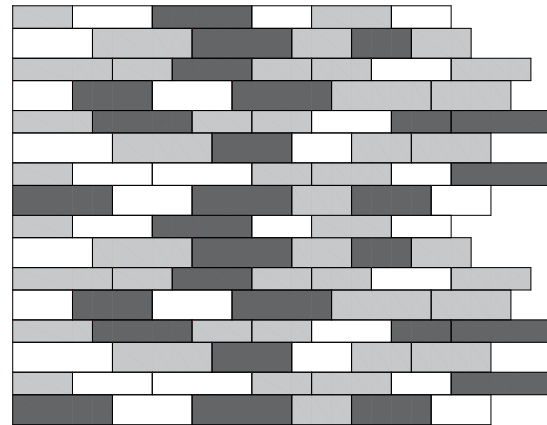


Image above shows Linaro in a random installation pattern. It is recommended to alternate the widths for each row. As with all lineal pavers, it is recommended to lay them perpendicular to vehicular traffic.



Silver Grey



Graphite




Midnight Black

Installation Instructions:


Permeable Installation

FULL EXFILTRATION

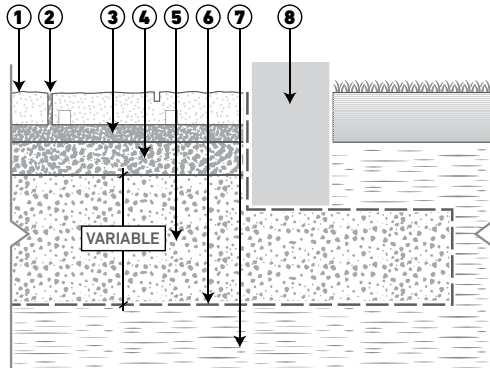

- 1 Paver
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- 3 Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5-10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5-28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

Sand Set Installation

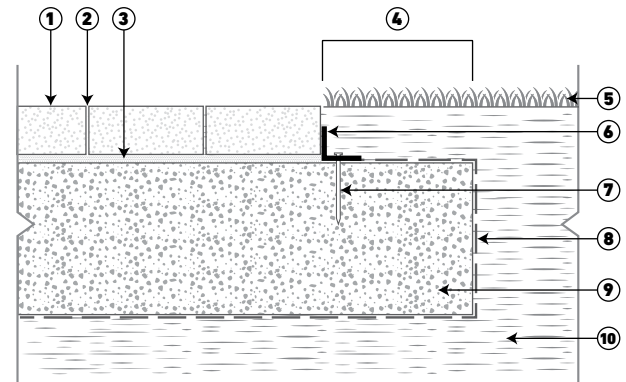

- 1 Paver
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade

H-20
HS-20

All our pavers meet the H-20/H-S20 loading requirements. This determination allows for an occasional heavy vehicle such as a fire truck driving on the pavers. Specific site requirements will determine the appropriate paver usage. For example, heavily trafficked areas require more robust pavers installed in specific laying patterns.

For more information on H-20/HS-20 Loading, please visit:
www.newstonegroup.ca/H-20-HS-20-Loading.pdf



Scan QR code
for more information