

Old Village Stone 5-Piece Combo

Premium Finish Face Mix Technology



Photo courtesy of Alliston Stoneworks 5-Piece Combo - Natur

The 5-piece combo mold with its collection of sizes appears as an ancient Roman road did hundreds of years ago.

COMBO MOLD 5-PIECE:




Size (in)	Туре	Sq.ft. per Pallet	Shipping Weight	PCS / Pallet
6" x 6" x 2-3/8" 151mm x 151mm x 60mm	А	108	1361kg / 3000lbs	54
6" x 9" x 2-3/8" 151mm x 228mm x 60mm	В			90
6" x 12" x 2-3/8" 151mm x 304mm x 60mm	С			27
9" x 9" x 2-3/8" 228mm x 228mm x 60mm	D			36
9" x 12" x 2-3/8" 228mm x 304mm x 60mm	E			36

All sizes including 3 mm Spacer Bars

COMBO MOLD PALLET LAYOUT

Image below shows the paver configuration on the pallet, see page 34 for laying pattern.



RECOMMENDED APPLICATIONS





Patios








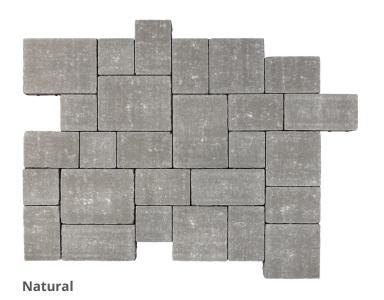

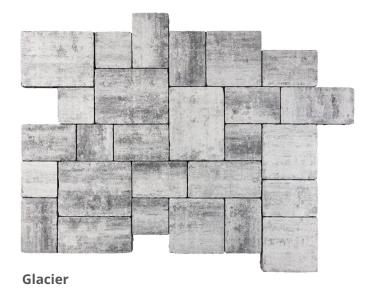





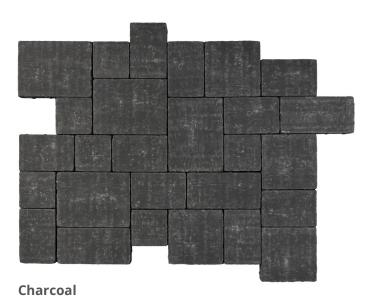




Installation Instructions:


Permeable Installation

FULL EXFILTRATION



- 1 Paver
- 2 Joint filling material ASTM No 10 (CSA 2-3mm) aggregate
- **3** Bedding course 1 1/5" to 2" (40 to 50 mm) ASTM No 8 (CSA 2.5–10mm) aggregate
- 4 Base course 4" (100mm) ASTM No 57 (CSA 5–28mm) aggregate foundation thickness
- 5 Subbase course ASTM No 2 (CSA 40-80mm) aggregate
- 6 Geotextile (optional)
- 7 Subgrade
- 8 Concrete Edge

Sand Set Installation



- 1 Paver
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade



All our pavers meet the H-20/H-S20 loading requirements. This determination allows for an occasional heavy vehicle such as a fire truck driving on the pavers. Specific site requirements will determine the appropriate paver usage. For example, heavily trafficked areas require more robust pavers installed in specific laying patterns.



Scan QR code for more information